

RMAT-1001 | 30dB Toggle Switch Step Attenuator

DC to 500MHz | 2W | 1.5:1 | 0 - 30dB

0 to 30dB Toggle Switch Step Attenuator designed for laboratory measurements and general testing purposes. Equipped with 2 x BNC-F, BNC-F/BNC-M, 2 x SMA-F or SMA-F/SMA-M connectors, there are 4 variants to choose from. This RF attenuator is manufactured to precisely meet the RF industry requirements, with quality connectors and toggle switches. Minimum attenuation is 0dB, maximum attenuation is 30dB in 6 steps. Maximum VSWR is 1.5:1 @ 450MHz/9dB selected attenuation (4+3+2dB). Maximum rated power is 2W.

■ Features:

- D.C. to 500MHz
- 30dB attenuation range
- 1/2/3/4/10/10dB steps
- equipped with SMA / BNC connectors
- max. power 2W (CW)

■ Typical applications:

- laboratory test applications
- prototyping and characterisation
- precision measurements
- instrumentation

■ Electrical Specifications:

@ TA = +25°C



Parameter	Testing conditions	Min.	Typ.	Max.	Units
Frequency Range	-	D.C.	-	500	MHz
Impedance	nominal		50		Ω
Attenuation Range	1/2/3/4/10/10 steps	0	-	30	dB
Insertion Loss	D.C. to 500MHz @ 0dB ATT	0.2	0.4	0.7	dB
	D.C. to 50MHz @ 10dB ATT	-	± 0.3	-	dB
Attenuation Accuracy	50MHz to 150MHz @ 10dB ATT	-	± 0.3	-	dB
	150MHz to 500MHz @ 10dB ATT	-	± 0.4	-	dB
VSWR	D.C. to 50MHz	-	1.02 : 1	-	
	50MHz to 150MHz	-	1.04 : 1	-	
	150MHz to 500MHz	-	1.2 : 1	-	
Return Loss	D.C. to 50MHz	35	41	47	dB
	50MHz to 150MHz	31	34	35	dB
	150MHz to 500MHz	19	22	24	dB

Note 1: Electrical specifications and performance data contained herein are based on ROWAVES applicable test performance criteria and measurement methods. Note 2: This document and the information contained herein is provided for evaluation purposes only and is subject to change without notice.

Typical Performance

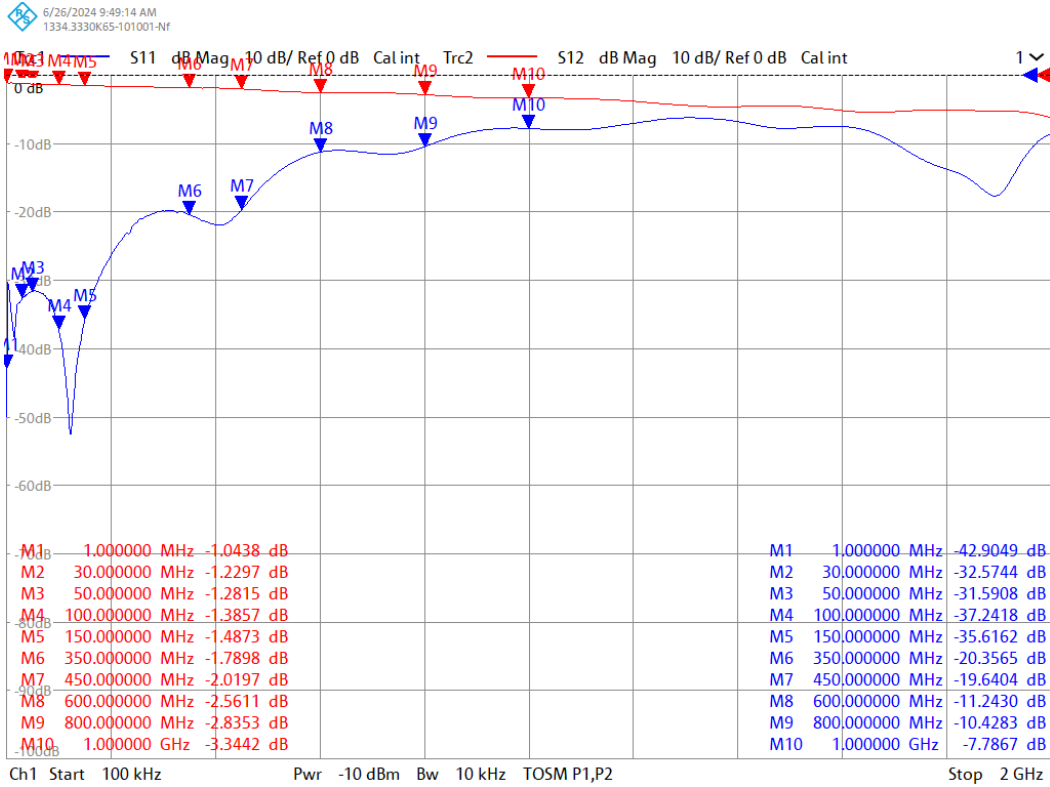


Fig. - S21(insertion loss) and S11(return loss) for 1db attenuation (2GHz span)

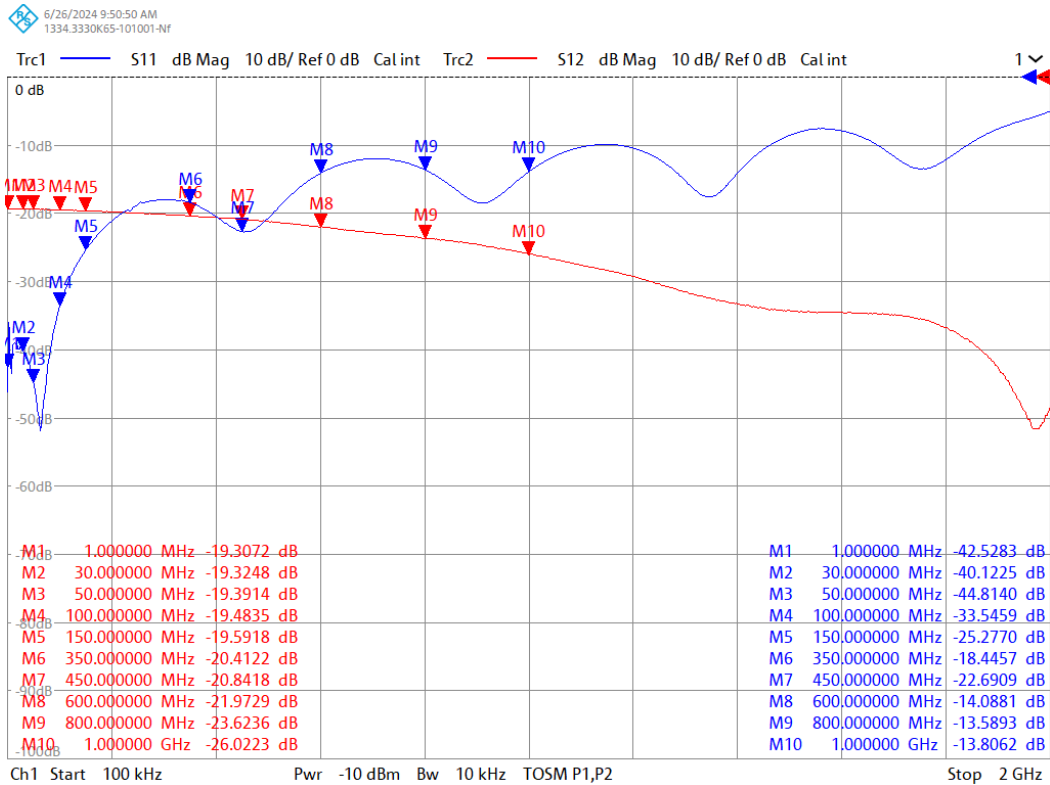


Fig.2 - S21(insertion loss) and S11(return loss) for 20db attenuation (2GHz span)

Note 1: Electrical specifications and performance data contained herein are based on ROWAVES applicable test performance criteria and measurement methods. Note 2: This document and the information contained herein is provided for evaluation purposes only and is subject to change without notice.


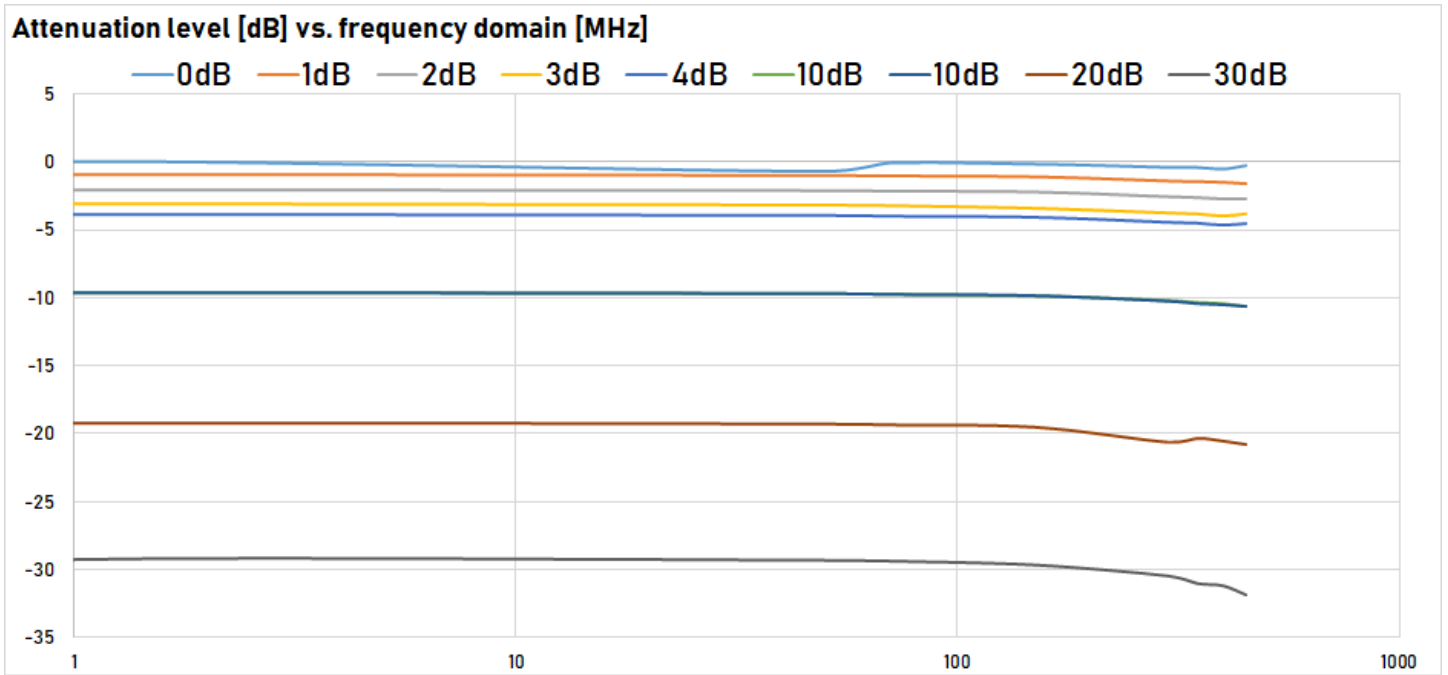


Fig.3 - Computed attenuation level vs. frequency domain

■ Outline drawing:

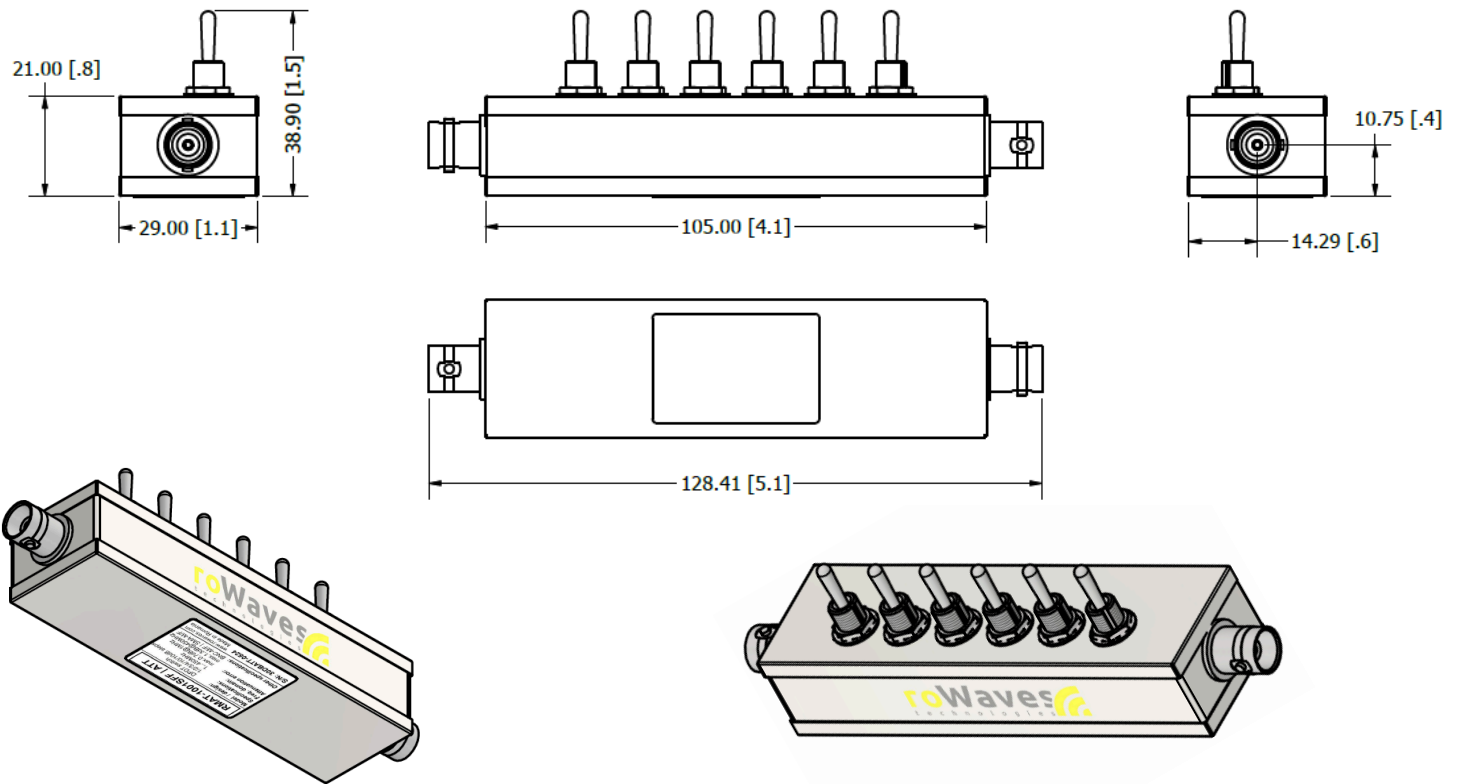

■ Mechanical specifications:

Note 1: Electrical specifications and performance data contained herein are based on ROWAVES applicable test performance criteria and measurement methods. Note 2: This document and the information contained herein is provided for evaluation purposes only and is subject to change without notice.

Parameter	Value	Unit	Comments
Length	132 / 5.2 ± 0.5mm	mm / in	with BNC-Female/Male connectors
Width	29 / 1.1 ± 0.5mm	mm / in	
Height	38.9 / 1.54 ± 0.5mm	mm / in	with toggle switches
Weight	130g / 0.3	g / lbs	with connectors

■ Connectors

Description	Connector 1	Connector 2
RMAT-1001BMF	50Ω BNC-Male, straight, flanged	50Ω BNC-Female, straight, flanged
RMAT-1001BFF	50Ω BNC-Female, straight, flanged	50Ω BNC-Female, straight, flanged
RMAT-1001SMF	50Ω SMA-Male, straight, flanged	50Ω SMA-Female, straight, flanged
RMAT-1001SFF	50Ω SMA-Female, straight, flanged	50Ω SMA-Female, straight, flanged

■ Ordering Information

Model	Description
RMAT-1001BMF	connector 1: BNC-male connector 2: BNC-female
RMAT-1001BFF	connector 1: BNC-female connector 2: BNC-female
RMAT-1001SMF	connector 1: SMA-male connector 2: SMA-female
RMAT-1001SFF	connector 1: SMA-female connector 2: SMA-female

Note 1: Electrical specifications and performance data contained herein are based on ROWAVES applicable test performance criteria and measurement methods. Note 2: This document and the information contained herein is provided for evaluation purposes only and is subject to change without notice.

■ Change History | DS-02

date	change	comment
11 Nov 2024	initial release	1st revision available
12 Nov 2024	updated att. vs. freq. plot updated insertion loss values updated rounded values in electrical specs table	1.1 release available
10 May 2025	updated logo and rebranding new data, updated disclaimer	rev.1.2 available

DISCLAIMER

ROWAVES SRL ("ROWAVES") PROVIDES TECHNICAL SPECIFICATIONS AND DATA (INCLUDING DATASHEETS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, AND OTHER INFORMATION AND RESOURCES "AS IS" AND WITH ALL FAULTS. ROWAVES DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT.

These resources are intended for developers skilled in the art of designing with ROWAVES products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards and other requirements. ROWAVES makes no guarantee regarding the suitability of its products for any particular purpose, nor does assume any liability whatsoever arising out of your use or application of any ROWAVES product. ROWAVES grants you permission to use these resources only for development of an application that uses ROWAVES products. Other reproduction or use of these resources is strictly prohibited. No licence is granted to any other ROWAVES intellectual property or to any third-party intellectual property. ROWAVES reserves the right to make changes to the product(s) or information contained herein without notice. ROWAVES is a trademark or registered trademarks of ROWAVES SRL, EU VAT registered company with EUID: R051570090.

All other trademarks used are the property of their respective owners.

© 2014 - 2025, ROWAVES SRL, Romania, www.rowaves.com